








# Smart Bias Tee 690 – 2700 MHz

# KATHREIN


Dimensional drawings:



78211055  
78211065

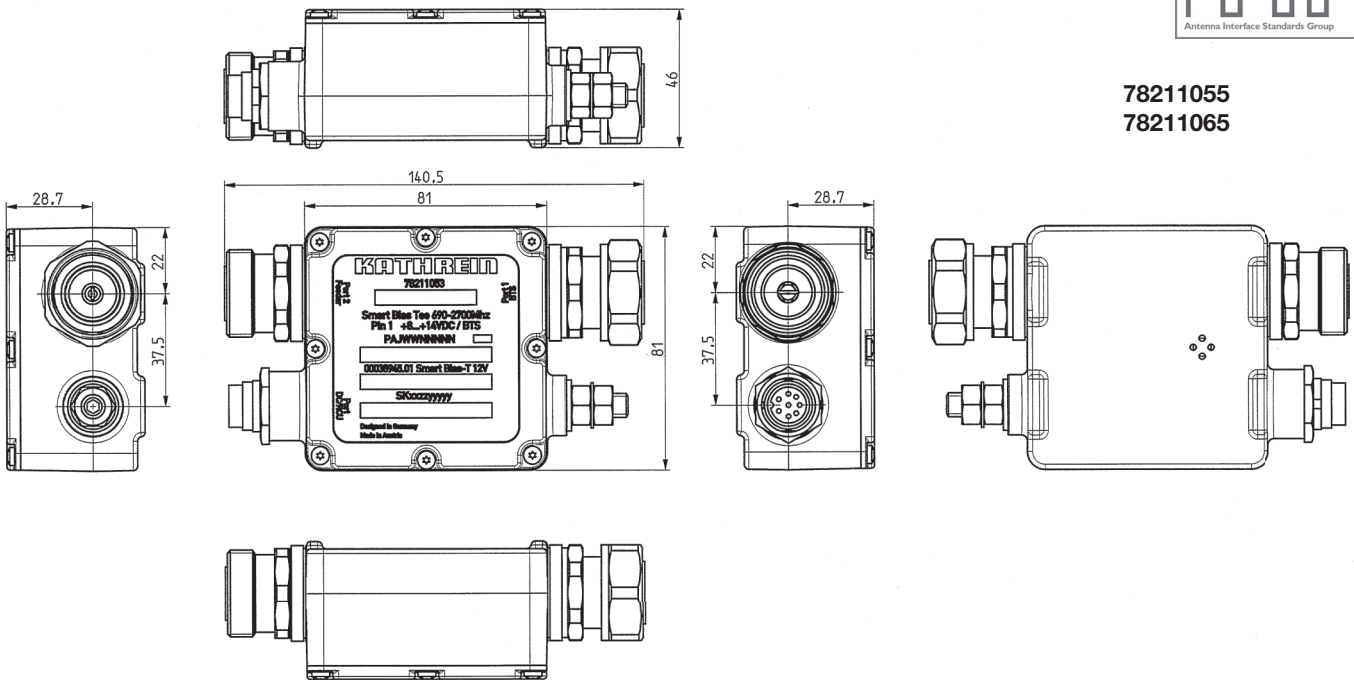

78211056  
78211066

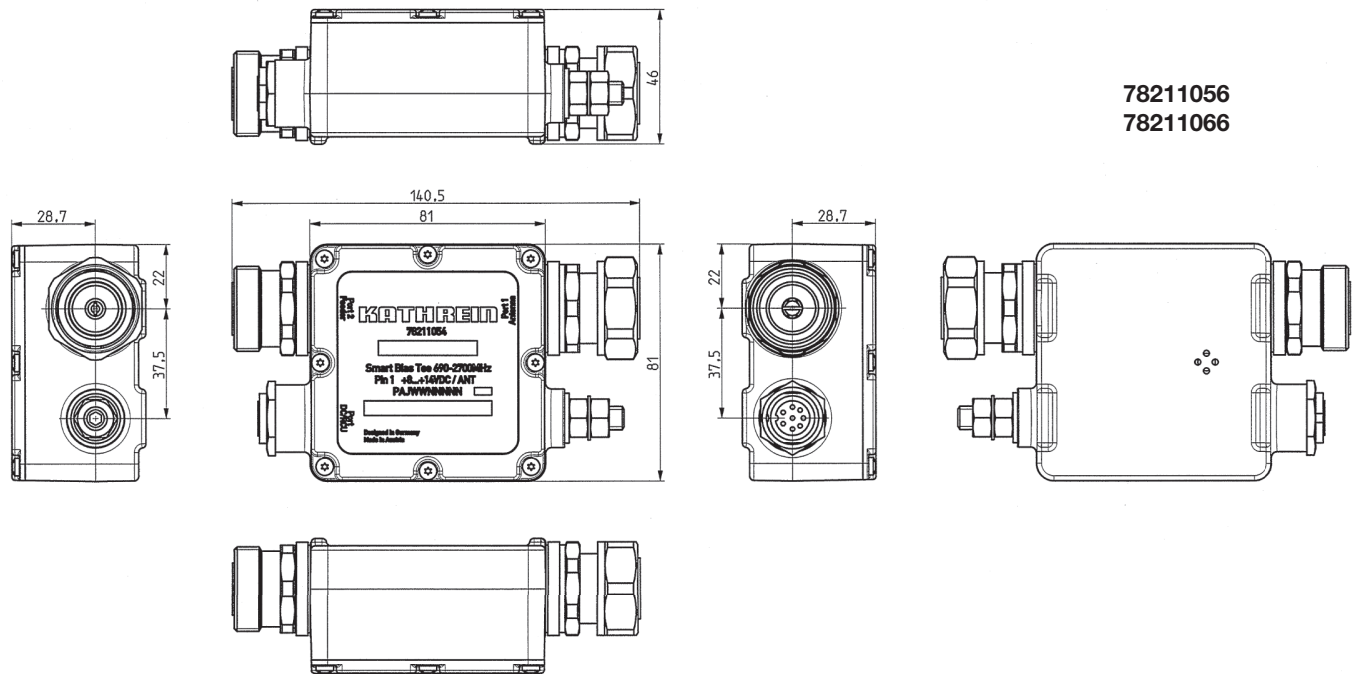

**Please note:**

The Smart Bias Tees are designed to operate under the environmental conditions as described in ETS 300 019-1-4 class 4.1 E and have passed environmental tests as recommended in ETS 300 019-2-4.

The installation team must be properly qualified and also be familiar with the relevant national safety regulations.

The coupling torque at 7-16 connectors is 25 – 30 Nm!  
Hold the smart bias tee housing securely while tightening the 7-16 locking nut.  
The tightening torque for fixing the AISG connector must be 0.5 – 1.0 Nm ('hand-tightened').

Subject to alteration.  
936.3819/i