

DC-Power and Signal Splitter For Remote Electrical Tilt (RET) Indoor and Outdoor Use

AISG compliant device for splitting of DC-power and control signals from one input to three outputs.



3-way-Splitter for RET

Type No.	860 10002
Connectors ¹⁾	4 x 8 pin connector according IEC 60130-9, 1 x male, 3 x female
Rated current (power supply)	3 A (at 50 °C)
Max. voltage	60 V
Protection class	IP 65
Weight	250 g
Packing size	114 mm x 117 mm x 117 mm
Height/width/depth	91 mm / 103 mm / 72 mm

¹⁾ The tightening torque for fixing the connector must be 0.5 – 1.0 Nm ('hand-tightened'). The connector should be thightened by hand only!




Material: Connector plate: Aluminum.
Cap: Plastic.

Mounting: Mast mounting by clamp.
Wall mounting by screws (not supplied).

Note: **Connectors must be situated at the bottom. No inverted mounting possible.**

Scope of supply: 3-way Splitter
Clamp (50 ...145 mm)

Block Diagramm:

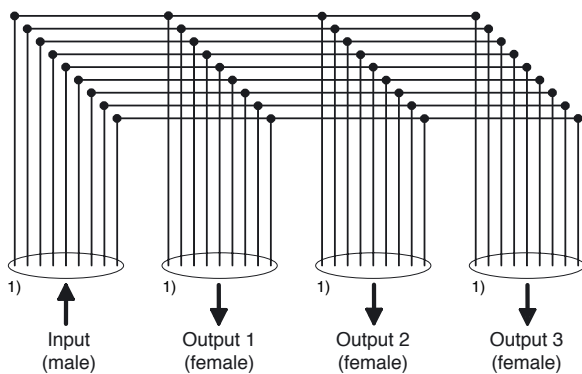

936.2226/g Subject to alteration.

