

Lightning Protection Device (LPD) For Remote Electrical Tilt (RET) Indoor and Outdoor Use

The device is designed for lightning protection of control cables carrying partial lightning currents up to 25 kA (shield) and 2.5 kA (inner conductor), according IEC 61643-1, IEC 61312-3. Each pin is protected individually.



Lightning Protection Device for RET

Type No.	86010030
Connectors ¹⁾	2 x 8 pin connector according IEC 60130-9, input: male, output: female
SPD-Type	8 x bipolar gas tube
Max. impuls current	25 kA (housing, shield) (10/350 μ s) inner conductors: 2.5 kA/pin (10/350 μ s)
Max. dynamic overvoltage at spark gap (1 kV/ μ s)	< 700 V
Static overvoltage (100 V/s)	< 100 V
Grounding	Via mounting plate / clamps at metallic surfaces or via separate cable, min. cross-section 5 mm ² Cu (screw M6)
Max. operation current	4 A at 50 °C
Max. operation voltage	60 V
Protection class	IP 55
Weight	250 g
Packing size	114 mm x 117 mm x 117 mm
Height/width/depth	91 mm / 103 mm / 72 mm

¹⁾ The tightning torque for fixing the connector must be 0.5 – 1.0 Nm ('hand-tightened'). The connector should be thightened by hand only!

Material: Connector plate: Aluminum.
Cap: Plastic.

Mounting: Mast mounting (50 – 145 mm diameter) by clamp.
Wall mounting by screws (not supplied).


Note: **No decoupling elements are integrated. The coordination with additional LPD's (device input) should be checked according to IEC 61312.**

Grounding of the device via the mounting plate at metallic surfaces or via additional grounding cable (not included in the delivery extend).

Connectors must be situated at the bottom. No inverted mounting possible.

Important: A control cable with a minimum length of 2 meters is required between Lightning Protection Device and Central Control Unit at the BTS to achieve the required decoupling.

Scope of supply: Lightning Protection Device
Clamp (50 ... 145 mm)

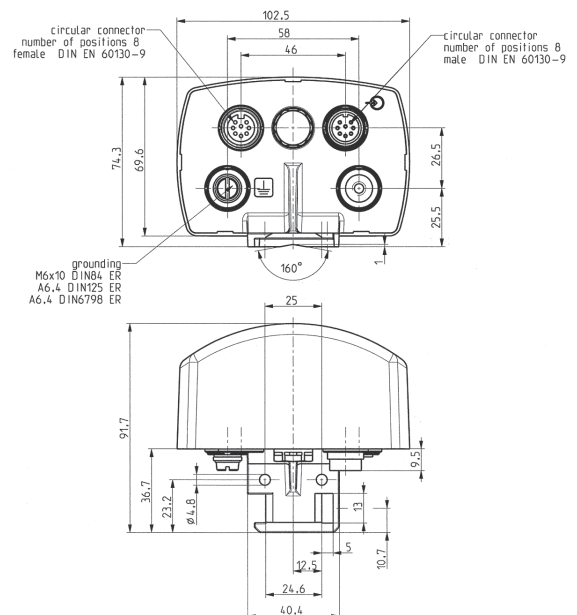

936.2367/f Subject to alteration.