

For indoor and outdoor use.

2-way Splitter 380–3800


Type No.	860 10130	860 10131
Connector (female)	N	7-16
Max. power (at 50 °C ambient temperature)	200 W	700 W
For connecting ... antennas	2	
Frequency range	380 – 3800 MHz	
VSWR	< 1.5	
Intermodulation IM3	< -150 dBc (2 x 43 dBm carrier)	
Impedance	50 Ω	
Insertion loss	< 0.05 dB	
Weight	750 g	870 g
Packing size	300 x 75 x 75 mm	

Material: Brass. Surface treatment: CuSnZn3
 Mounting: Bracket for wall mounting included in the scope of supply.
 For pipe mast mounting use clamps listed below (order separately).
 DC capability: DC transmission between all terminations (suitable for remote power supply systems).
 Environmental conditions: ETS 300 019-1-4 class 4.1 E
 – Low temperature: -55 °C
 – High temperature (dry): +60 °C
 IP 65




860 10131

860 10130

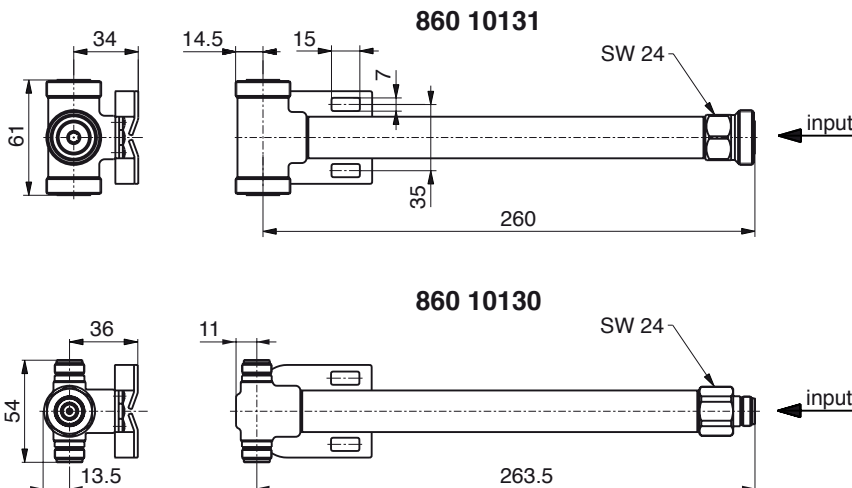

Mounting Options:

Model	Description
131 1847	Mounting Kit for 2 to 5.7" (51 to 145mm) OD mast



131 1847

936.3441/a Subject to alteration.