


DTMA-1900-AWS-BYP400t1000-12-AISG-CWA-Y

Fullband Double Dual Duplex Tower Mounted Amplifier (Masthead Amplifier)

KATHREIN

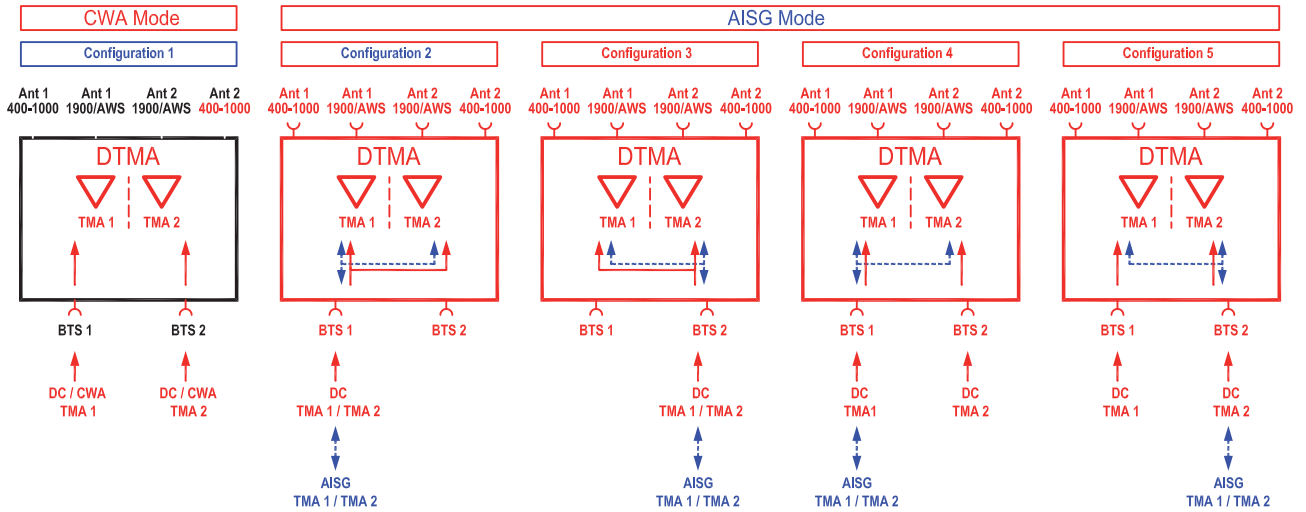

936.4848/a Subject to alteration.

Accessories (included)


Type No.	Clamp set suitable for mast diameter of
734365 [mm in]	45 – 125 1.77 – 4.92



DTMA-1900-AWS-BYP400t1000-12-AISG-CWA-Y

Fullband Double Dual Duplex Tower Mounted Amplifier (Masthead Amplifier)

KATHREIN

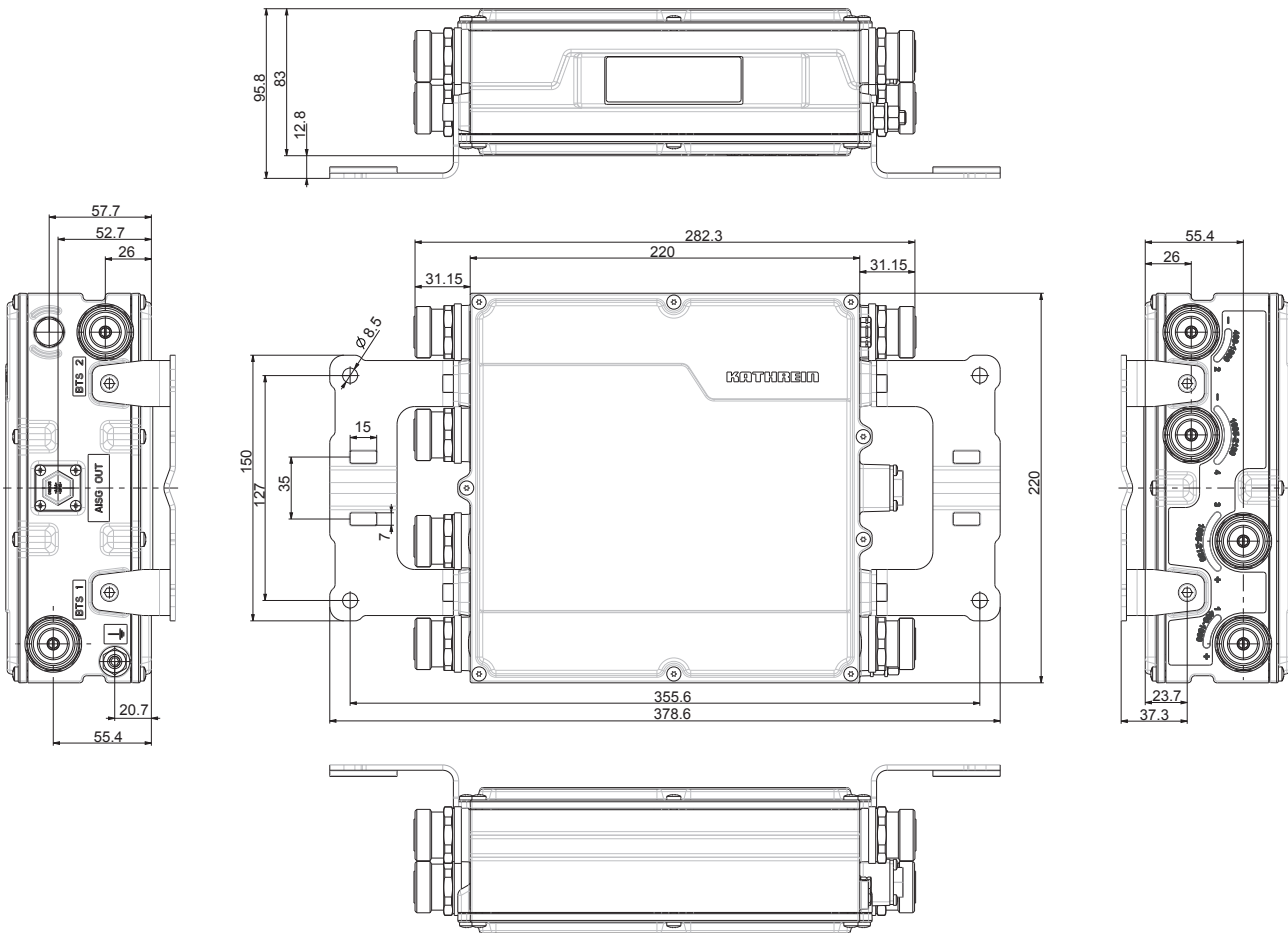

Mounting Instructions

The coupling torque at 7-16 connectors is 25 - 30 Nm! The tightening torque for fixing the AISG connector must be 0.5 – 1.0 Nm ('handtightened').

It is recommended to install the DTMA's with the antenna connectors pointing upwards and the BTS connectors pointing downwards.

In case of DTMA's with RET-connectors (Remote Electrical Tilt-connectors according to AISG Standard) it is **recommended** to mount the DTMA's in such a way that the RET-connector **always points downwards!** A downward slanted mounting position between the vertical and horizontal plane is also allowed.

AISG Setting

The protocol of the software interface can be switched between AISG 2.0 / 3GPP and AISG 1.1 and vice versa with a vendor specific command (depending on default setting).

If the primary station does not support the default setting, it has to be switched over before system start-up. Please contact Kathrein for further information.

Please note

The DTMA is not designed for permanent operation under water. Test conditions for the IP67 rating: submerge depth 1 m, submerge time 1 hour.

As a result of more stringent legal regulations and judgements regarding product liability, we are obliged to point out certain risks that may arise when products are used under extraordinary operating conditions.

Extraordinary operating conditions, such as heavy icing or exceptional dynamic stress (e.g. strain caused by oscillating support structures), may result in the breakage of a mast mounted device or even cause it to fall to the ground.

KATHREIN tower mounted amplifiers are designed to operate under the environmental conditions as described in ETS 300 019-1-4 class 4.1E and have passed environmental tests as specified in ETS 300 019-2-4. The homogenous design of KATHREIN's tower mounted amplifiers use identical modules and materials. Extensive tests have been performed on typical samples and models.

The installation team must be properly qualified and also be familiar with the relevant national safety regulations.

The details given on our data sheets have to be followed carefully when installing the antennas, filters, combiners, amplifiers and accessories.

The limits for the coupling torque of RF connectors, recommended by the connector manufacturers must be obeyed.

Any previous datasheet issues have now become invalid.



Subject to alteration.
936.4848/a